Connector eSATApd female eSATA + USB 2.0 5 V / 12 V

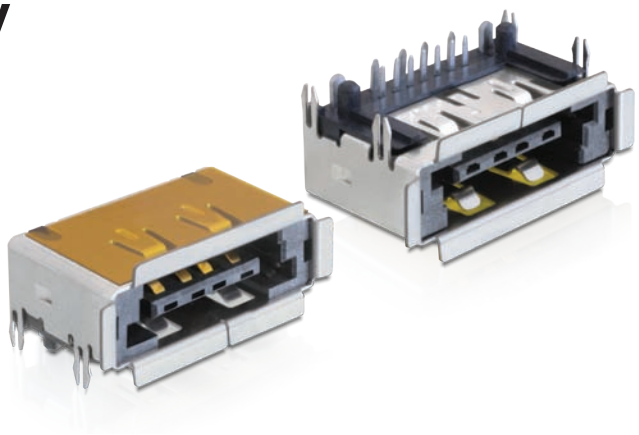

Description

This eSATApd connector by Delock can be soldered on your PCB and enables you to connect different devices e.g. 2.5 or 3.5 HDD. The sideways gold-plated connector support a voltage up to 12 V. Therefore you do not require an additional power supply. Due to the multifunctional Power Over eSATA interface, you have 3 options for connection:

1. Power Over eSATA port (5 V / 12 V)
2. USB port and
3. eSATA port + USB port for power supply

Ref.	65297
EAN	4043619652976
Country of origin	Taiwan
Customs tariff number	84718000

Specification

- Connector: eSATA + USB 2.0 female > 11 pin DIP type
- THT PCB assembly
- USB solder pins: Ø 0.6 mm
- eSATA solder pins: Ø 0.44 mm, pitch: 1.27 mm
- Housing material: thermoplastic high temp UL 94-V0
- Operating temperature: -40 to +85 °C
- Contact area (eSATA + USB): gold-plated
- Dimension (LxWxH): 18.7 mm x 11.35 mm 8.68 mm

System requirement
- PCB with eSATA + USB 2.0 through holes

Package content
- Connector

Package
- Delock poly bag

© 2011 by Delock. All names and symbols mentioned here are property of the respective producer.
Printing errors, changes and errors excepted.